


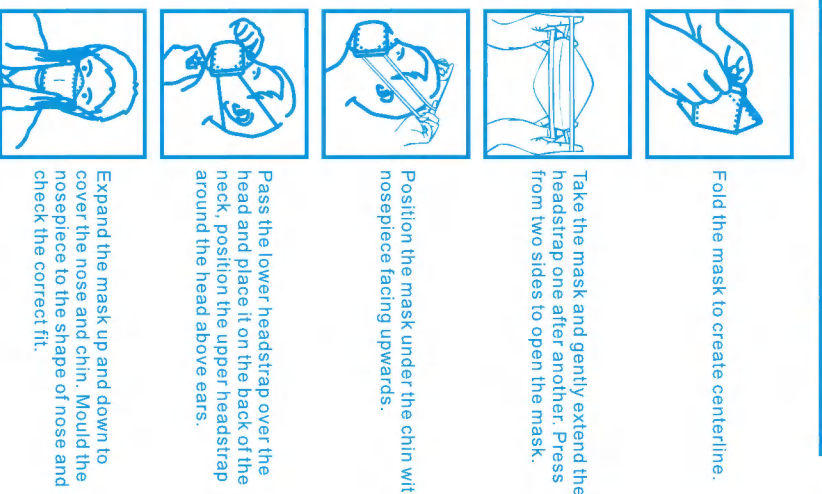

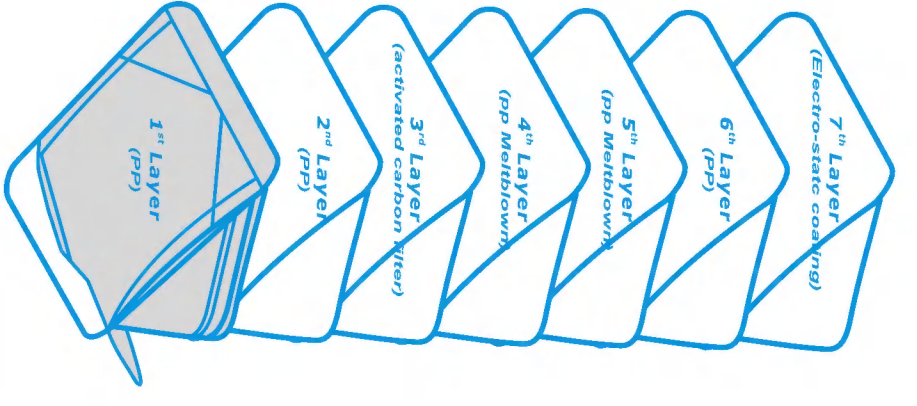





<div>   </div>			
<div>  <p>NT-V MASK</p> <p>U.S. Pat.Pend.11/437,788</p> <p>www.champak.com.tw</p> </div> <div> <p>Warning</p> <ol style="list-style-type: none"> Do not use this mask as protection against toxic particles, gases or vapors, solvents from spray-painting operations, or in explosive atmospheres. This mask should not be worn when conditions prevent a good face to face piece seal. Such conditions includes the growth of beards or mustache and sideburns and the use of spectacles or any other devices containing temples or straps which pass between the mask sealing edge and the wearers face. Leave the work area immediately if breathing becomes difficult or dizziness or any other signs of distress occur. The instruction for use and warning is helpful for correct using of the product and to prevent risks of health. It is peremptory to read it carefully and to follow it. <p>Storage and Shelf life</p> <p>The shelf life of the mask is 3 years and the mask should be placed in a container and store in a clean cool and dry atmosphere to ensure that it is protected again dust, chemicals, moisture, excessive heat and direct sunlight.</p> <p>- Easy breathing</p> <p>- Long duration</p> </div>	<div> <p>Instruction for fitting:</p>  <p>Patent Pending: 11/437,788</p> <p>x 30pcs</p> </div>	<div>  <p>NT-V MASK</p> <p>U.S. Pat.Pend.11/437,788</p> <p>www.champak.com.tw</p> </div> <div>  <p>N95</p> <p>NIOSH</p> <p>National Institute for Occupational Safety and Health</p> <p>Product of : Champak enterprise co., Ltd</p> <p>No 27-1, Jhaiming St.Dasi,</p> <p>Taoyuan,335,Taiwan</p> <p>www.champak.com.tw</p> <p>+886-3-3808818</p> <p>+886-3-3801103</p> </div>	<div> <p>Instructions for use</p> <ol style="list-style-type: none"> Not for use in atmospheres containing less than 19.5 percent oxygen. Not for use in atmospheres immediately dangerous to life or health. Do not exceed maximum use concentrations established by regulatory standards. Failure to properly use and maintain this product could result in injury or death. All approved respirators shall be selected, fitted, used, and maintained in accordance with MSHA, OSHA, and other applicable regulations. Never substitute, modify, add, or omit parts. Use only exact replacement parts in the configuration as specified by the manufacturer. Refer to User's Instructions and/or maintenance manuals for information on use and maintenance of these respirators. NIOSH does not evaluate respirators for use as surgical masks. This mask must not be used for more than 8 hours (working shift). Always discard and replace the mask, when the breathing resistance becomes excessive or at the end of every working shift. No alteration or modification is allowed. Never use damaged masks, in that case discard these masks. The wearer of the mask must be well trained to use properly before starting work. Facial hair (beard or sideburns) of the user within the area of the sealing edges of the mask may jeopardize the protection efficiency of the mask itself. <p>  -5°C~+50°C  >60%  </p> <p>LOT : XXXXX</p> </div>